


1 flg. Muffenkugelhahn, Typ 300 G, 1.4408


Dichtung: PTFE, PN 64 bar



NW	d1	L	H
8	1/4"	39	35
10	3/8"	44	37
15	1/2"	56,5	43,5
20	3/4"	58	47
25	1"	71	50
32	1 1/4"	78	57
40	1 1/2"	83	69
50	2"	100	74,5

2 flg. Kugelhahn, voller Durchgang, Typ 300 F, V4a/316


1000 WOG, Dichtung: PTFE, geringes Gewicht, mit abschließbarem Griff, Innengewinde



NW	d1	L	H
8	1/4"	48,5	106
10	3/8"	48,5	106
15	1/2"	58	106
20	3/4"	65	106
25	1"	77	126
32	1 1/4"	90	126
40	1 1/2"	98	150
50	2"	120	181
65	2 1/2"	145	226
80	3"	161,5	266



3 flg. Kugelhahn, voller Durchgang, Typ 352 (S/S oder G/G), V4a/316

Arbeitsdruck: PN 25 - PN 64, mit Innengewinde oder Schweißende Auch mit Flanschanschluss lieferbar



NW	d1	L	H
8	1/4"	65	100
10	3/8"	65	100
15	1/2"	70,8	115
20	3/4"	81,5	132
25	1"	90	132
32	1 1/4"	112,5	150
40	1 1/2"	126,5	175
50	2"	147	175
65	2 1/2"	186	260
80	3"	213	260
100	4"	228	290

Flansch-Kugelhahn, 2flg. Baulänge F4, 1.4408

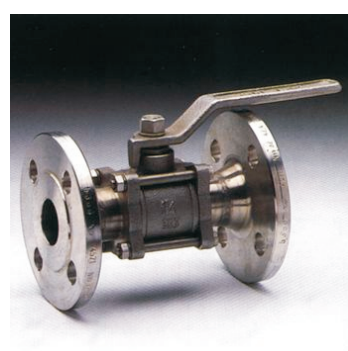


NW	d1	L	H
15	1/2"	115	66
20	3/4"	120	74
25	1"	125	87
32	1 1/4"	130	92
40	1 1/2"	140	105
50	2"	150	115
65	2 1/2"	170	153
80	3"	180	162
100	4"	190	179

3 Wege Muffenkugelhahn -L-Bohrung, 1.4408

NW	d	L	H
8	1/4"	79	63
10	3/8"	64	53
15	1/2"	64	53
20	3/4"	76	63
25	1"	87	66
32	1 1/4"	87	81
40	1 1/2"	96	83
50	2"	142	96


Dichtung: PTFE

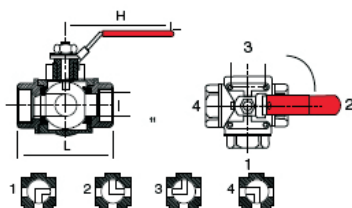

3 Wege Muffenkugelhahn - T-Bohrung, 1.4408

NW	D	L	H
8	1/4"	79	63
10	3/8"	75	59
15	1/2"	75	59
20	3/4"	85	64
25	1"	100	80
32	1 1/4"	115	95
40	1 1/2"	125	96
50	2"	148	106


Dichtung: PTFE

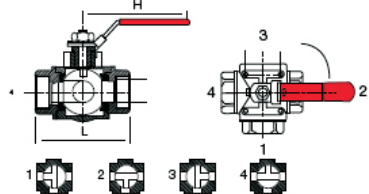

Muffenschieber, 1.4408

NW	d	L	H
10	3/8"	54	52
15	1/2"	57	98
20	3/4"	60,5	104
25	1"	67	115
32	1 1/4"	76	127
40	1 1/2"	87	172
50	2"	95	189

Temperatur: 200°



Rückschlagventil, 1.4408

NW	d	L	H
8	1/4"	65	46
10	3/8"	65	46
15	1/2"	65	46
20	3/4"	80	58
25	1"	90	69
32	1 1/4"	105	75
40	1 1/2"	120	85
50	2"	140	98

